SAIL	W.T.	LUFF	FOOT	LEACH	AREA	REMARKS
MAIN SAIL		SEE	SAIL	PLAN		
No2 JIB		21.25'	8.91'	18.16'	.82	
WORKING JIB		28.38'	12.66'	26.33'	165	
MEDIUM GENOA		34.0'	17.83'	33.91'	290.00	
LIGHT GENOA		34.41'	19.08'	34.66'	317.00	
SPINNAKER		C	C	A	MAX.	
STORM JIB		14.33'	6.21'	11.33'	35.0'	14" TACK PENNANT

— GENERAL NOTES —

1.- ALL SAILS DACRON UNLESS OTHERWISE SPECIFIED.
2.- WEIGHT OF MATERIAL IS OUNCES PER YARD U.S. STD WIDTH 28½"
3.- EXCEPT FOR MAINSAIL ALL SAILS TO BE CUT VERY FLAT.
4.- ALL BATTEN POCKETS OFFSET TYPE.
5.- ALL BATTENS TO BE TAPERED.
6.- ALL SAILS TO BE MARKED AT HEAD WITH SAIL NAME BOAT NAME & YEAR.
7.- ALL BAGS TO BE SYNTHETIC MARKED IN THREE PLACES AS PER SAILS.
8.- ALL WIRE HEAD PENNANTS TO BE COATED STAINLESS WIRE.

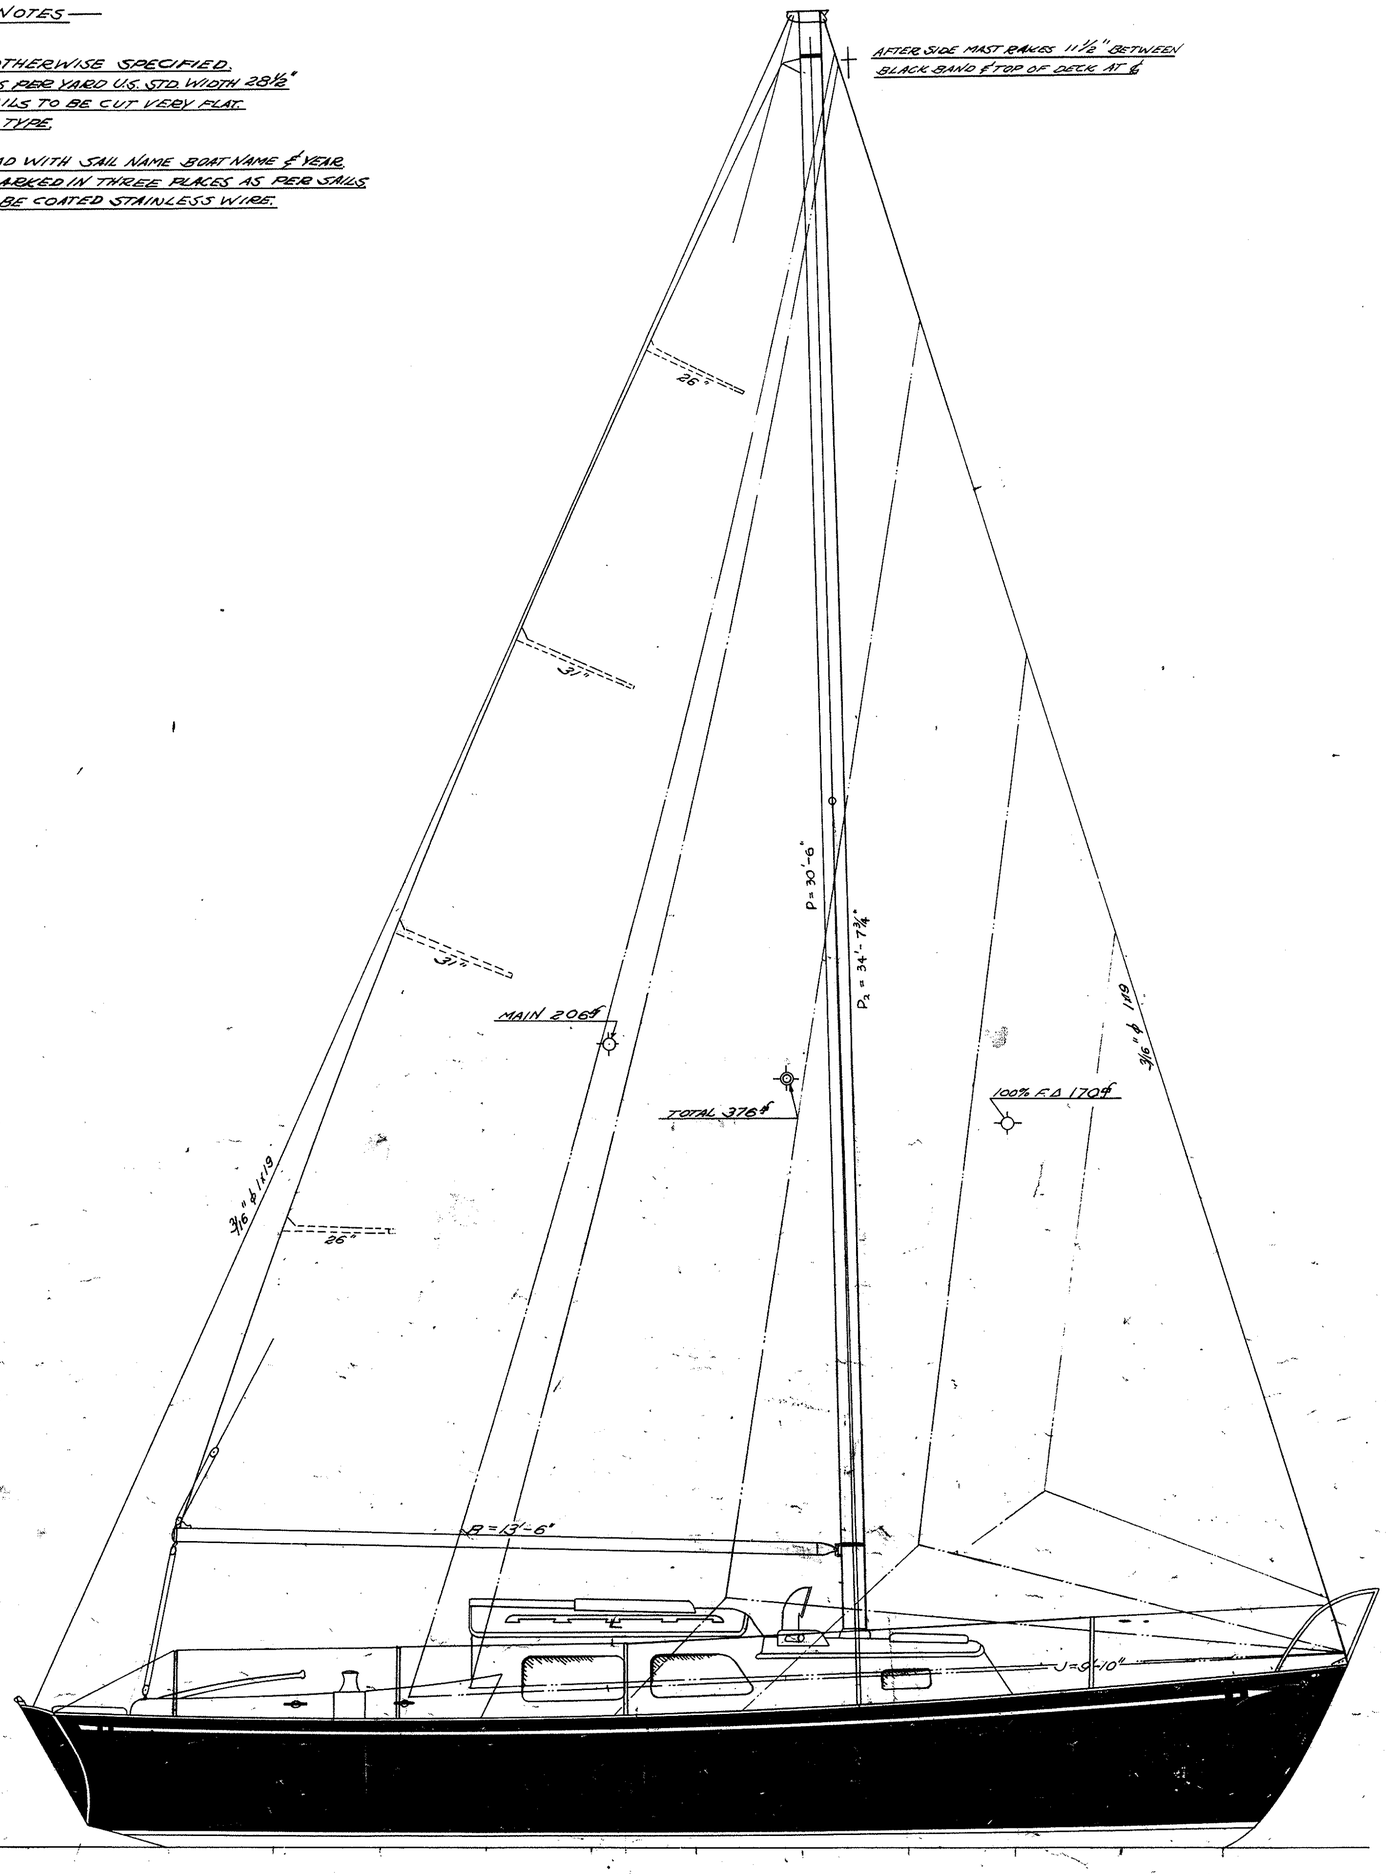

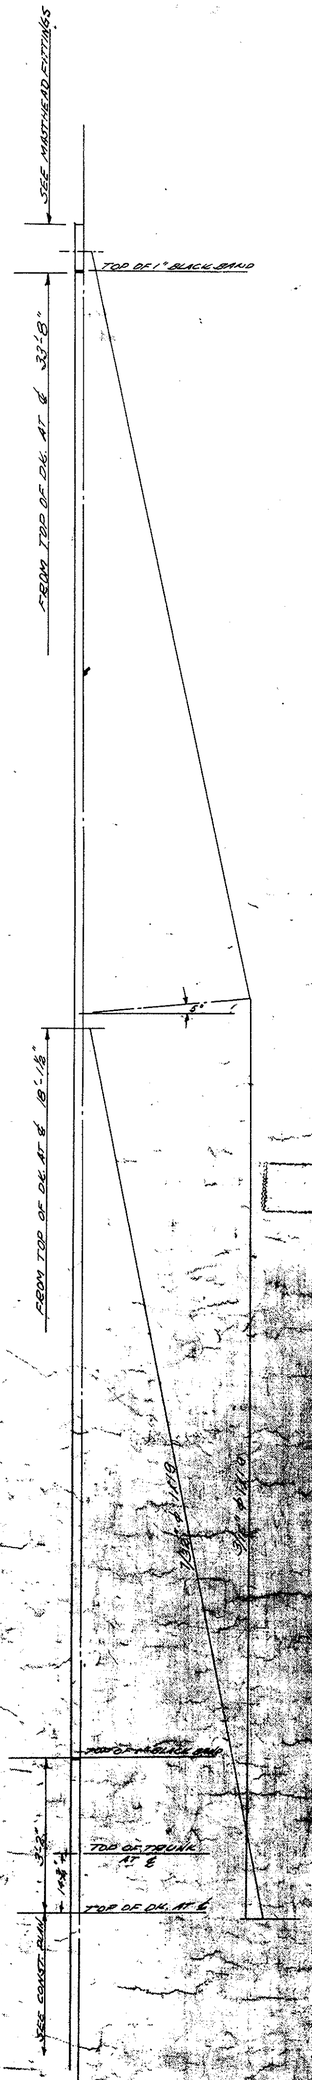

B	1	ADDED STORM JIB	JUN 24 1965
A	1	REVISED AREAS OF No.2 & WORKING JIBS	DEC 11 1961
No		ALTERATIONS	DATE

DESIGN No 1617
SLOOP SAIL PLAN
OF A
27'-0" L.O.A. AUX SLOOP
FOR
DOUGLASS & McLEOD INC.
SCALE ½" = 1'-0"
LOA 27'-0¼" BEAM 8'-2½"
DWL 21'-5½" DRAFT 5'-3"
SPARKMAN & STEPHENS INC.
79 MADISON AVE NEW YORK 16, N.Y.
AUG 3, 1960 SH 1 DWG # 617-27
ALT